

Gill Tailor

Contents

Basic Guideline before Measuring	1
Measure Regulation of Pant	2
Waist	2
Seat	3
Thigh4	ļ
U-rise5)
Pant Length6	Ü
Bottom7	
Knee8	3



Basic Guideline before Measuring

To ensure the measurements are precise, please pay attention to the following tips:

- 1.Put the garment on the table or floor and make sure it is flat and smooth without any wrinkle before measuring.
- Please follow our regulation strictly for each item to guarantee the finished garment made by us is exactly the same as your original one.

If you have any question or meet any special situation when you are taking the measurement, please free feel to contact our customer representative directly.





1. Waist: Keep the pant flat without any wrinkle, make sure the front waistband and back waistband is overlapped and aligned, fasten the front buttons and hook. Measure along the top waistband horizontally, twice of this measurement is finished waist.






2. Seat: Unfold the pleats, and zip up half of the zipper. Measure 0.8 inch above the zipper bottom paralleled to the front waistband, twice of this measure ment is finished seat.





3. Thigh: Fold the pant along the crease line, measure horizontally 1 inch under the bottom of crotch, twice of this measure ment is finished thigh.



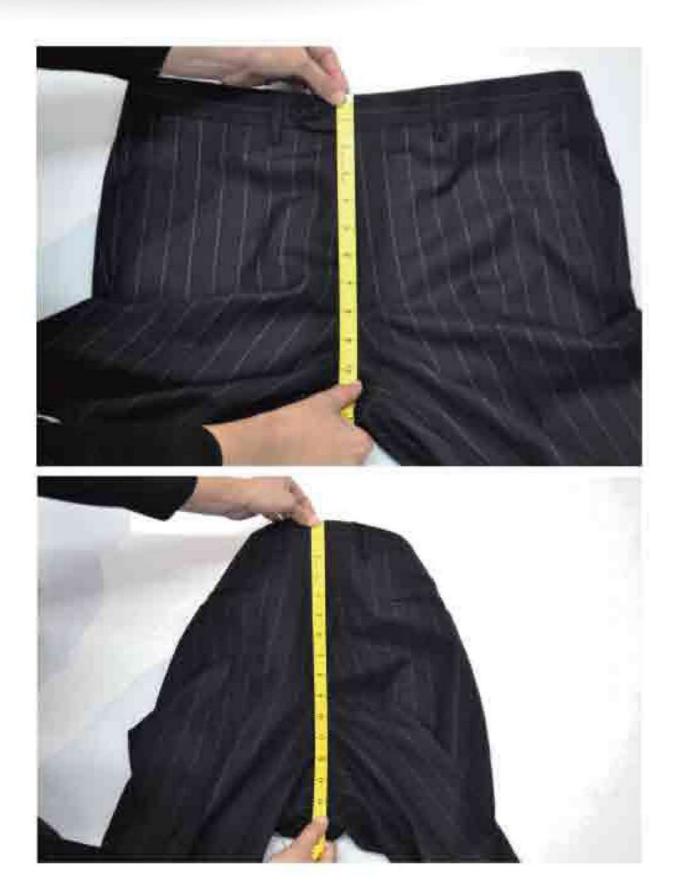


4.U-rise: Keep the crotch flat, measure from the center front top waist down to the crossing of crotch and up to the center back top waist.





5. Pant Length: Fold the pant flat, measure from the top waistband along the side seam vertically down to the bottom hem.



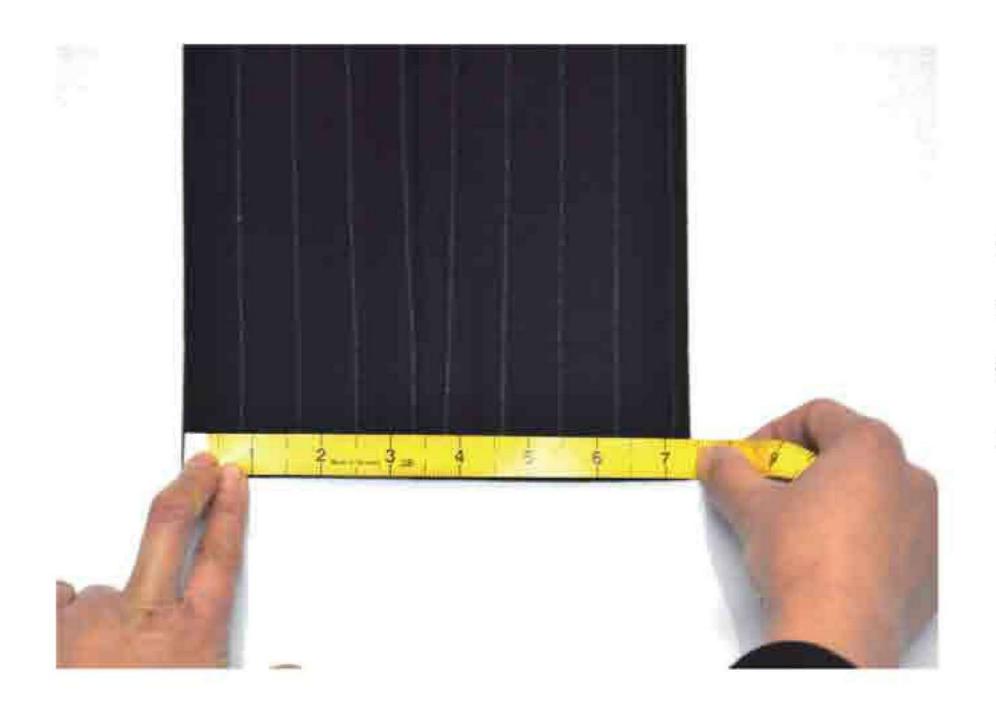

6. Bottom: Put the bottom opening aligned, measure horizontally along the opening, twice of this measure ment is finished bottom.





Knee: Fold the pant along the crease line, measure horizontally 2 inch above half inseam, twice of this measurement is finished knee.

